

THE MADE TO MEASURE HY-CAN RANGE



HY-CAN DISPLAY TAG / PLUS

Fully customisable through modular circuitry, design and construction.
Designed for offices or flats where the occupants can frequently change.

RELAYS

- Interchangeable
- Alternatives

LANDLINE OR 4G LTE

- 4G LTE backwards compatible, allowing access across 4G, 3G, 2G networks

SOFTWARE

- Programming of more complex settings
- 1 - 24 Electronic Backlit Displays, remotely programmable

CONFIGURATION

- Based on a Hub and Satellite configuration
- Integration with supplementary TelPad

CUSTOMISED PANEL AND BACKBOX

- Size depends on number of Displays
- Dimensions site specific
- Materials and Colours, customer choice

ADDITIONAL OPTIONS

- Hearing Aid Induction Loop
- Microphone Blower
- Cut Outs available: Camera, Prox Reader, Fire Switch

EASY TO USE

- I The call buttons have the ability to cascade through 8 landline or mobile phone numbers. Once answered, if the recipient wants to grant access to the visitor they simply press the # key on their phone.

DOWNLOADABLE ACTIVITY LOGS

- I Download the last 10,000 interactions with the unit and see who is gaining entry, how and when. Providing a great security feature.

DIAL TO OPEN

- I Authorise up to 900 numbers the ability to call the unit and open your door/gate. A modern and more cost effective alternative to traditional access control.

EASY TO INSTALL

TWO YEAR WARRANTY

- I Including Programming Support.

4G LTE / LANDLINE SPECIFICATION



H 250 x W 120 x D 57
(Minimum, depending on configuration)



HUB H 185 x W 98 x D 35

STANDARD FEATURES AND BENEFITS

- I 316 Marine Grade Flush or Surface Mounted Stainless Steel Faceplate and Backbox
- I Stainless Steel Security Screws
- I Forward Facing Microphone
- I Electronic Voice Assist with **THS** Horwood quality sound
- I Backlit LCD Screen
- I Backlit, Vandal Resistant IP64 rated Keypad (optional)
- I Programmable Temperature Control
- I 1 ~ 24 Call Points
- I Programmable to call up to 8 cascading numbers from each call point
- I 400 Pin / Entry Codes (where Keypad is fitted)
- I Internal Time Clock with 9 profiles and auto BST/GMT
- I Timed 'Trade' and 'Clear' Buttons
- I SMS Alerts (4G LTE only)

THE MADE TO MEASURE HY-CAN RANGE




HY-CAN DISPLAY TAG / PLUS

4G LTE / LANDLINE SPECIFICATION

TECHNICAL SPECIFICATION

- POWER:** 12 Volt 1 Amp. DC PSU fitted with a 3A fuse (*supplied and must be dedicated to the Telguard intercom unit*).
Power Consumption: 400mA Idle @ 12V + each Tag allow 20mA.
- CABLE DISTANCE:** Maximum 300 metres from the hub.
- TRADE BUTTON:** Linked to internal time clock (*with keypad option*).
- BST/GMT Updates:** Automatic.
- PHONE LINE (Landline Option):** Analogue BT type line or PABX analogue extension.
- TONE TYPE:** DTMF (*Dual Tone Multi Frequency*).
- PROGRAMMING:** Locally or remotely by phone, keypad, by text (*4G LTE only*), by modem.
- AUXILIARY INPUT:** x 1.
- RELAYS:** 3: 1 x 3A, 2 x 400mA.
- RELAY OUTPUTS:**
 - Dual Opto (Semiconductor Relay)**
 - Max switching current 400mA, no minimum
 - Max switching voltage 60V AC or DC
 - Single Power (Mechanical Relay)**
 - Max switching current 3A, minimum 50mA
 - Max switching voltage 60V AC or DC
- RELAY ACTIVATION TIME:** 1 ~ 60 seconds.
- VOLUME:** Adjustable 1 ~ 9 levels.
- OPERATING COMMANDS:** 9 x Configurable # commands.
- EXIT RELEASE INPUT:** Via Auxiliary input.

DOWNLOAD THE 'COMMTEL COMMAND ONE' APP

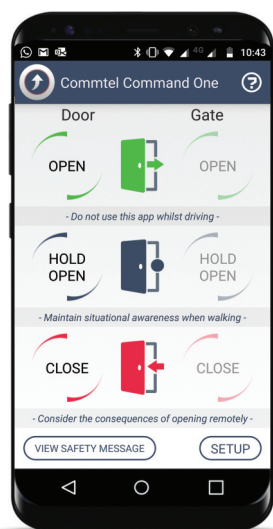

OPEN | HOLD | CLOSE
at the click of a button

www.telguard.co.uk/support/downloads/apps.html

EU CE Declaration of Conformity and Radio Equipment Directive
is available at www.commtel-uk.com | GB-RH10 9XN



Raising Standards
Safety Assured



TG_DT/P_SPEC_ISSUE3_10:19