

THE MADE TO MEASURE HY-CAN RANGE



HY-CAN DDA BESPOKE

Fully customisable through modular circuitry, design and construction for:

- Emergency Help Points
- Disability Assistance Call Points
- Disabled Persons Door Access Points

RELAYS

- Interchangeable
- Alternatives

LANDLINE OR 4G LTE

- 4G LTE backwards compatible, allowing access across 4G, 3G, 2G networks

SOFTWARE

- Programming of more complex settings

CONFIGURATION

- Hub and Satellite / High Low application
- Integration with supplementary TelPad

CUSTOMISED PANEL AND BACKBOX

- Dimensions site specific
- Materials and High Visibility Colours available
- Panel Bespoke Engraving and Languages

ADDITIONAL OPTIONS

- Hearing Aid Induction Loop
- Cut Out available: Camera, Prox Reader, Fire Switch
- Relays can be safe side with control unit housed separately

EASY TO USE

- I The Call Buttons have the ability to cascade through 8 landline or mobile numbers. The recipient grants access by simply pressing the # key on their phone.

DOWNLOADABLE ACTIVITY LOGS

- I Download the last 10,000 interactions with the unit and see who is gaining entry, how and when. Providing a great security feature.

DIAL TO OPEN

- I Authorise up to 900 numbers the ability to call the unit and open your door/gate.


EASY TO INSTALL

TWO YEAR WARRANTY

- I Including Programming Support.




4G LTE / LANDLINE SPECIFICATION

STANDARD FEATURES AND BENEFITS

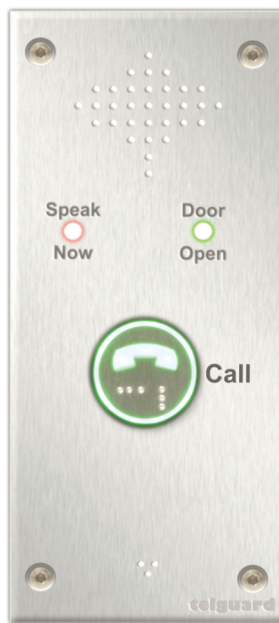

- I DDA Compliant*
- I Status LEDs
- I Large Backlit, Halo Illuminated Buttons
- I Braille Buttons available
- I 316 Marine Grade Flush or Surface Mounted Stainless Steel Faceplate and Backbox
- I Stainless Steel Security Screws
- I Electronic Voice Assist with **THS** Horwood quality sound
- I Vandal Resistant IP64 rated Button and optional Keypad
- I Programmable Temperature Control
- I 1~10 Call Points
- I Programmable to call up to 8 cascading numbers from each call point
- I 400 PIN Codes (with Keypad option)
- I Internal Time Clock with 9 profiles and auto BST/GMT
- I SMS Alerts (4G LTE only)

*Disability Discrimination Act / Equality Act 2010

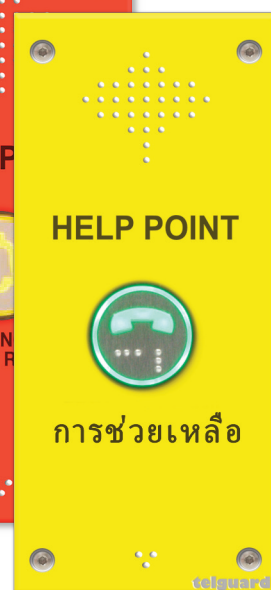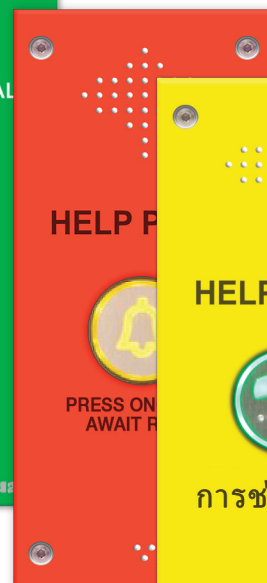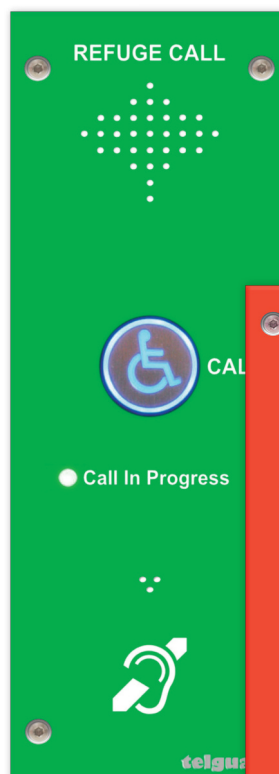

H 200 x W 90 x D 62
(Standard minimum size)

TECHNICAL SPECIFICATION

- POWER:** 12 Volt 1 Amp. DC PSU fitted with a 3A fuse (*supplied and must be dedicated to the Telguard intercom unit*).
Power Consumption: 120mA Idle @ 12 Volts.
- PHONE LINE (Landline Option):** Analogue BT type line or PABX analogue extension via ATA device.
- 4G LTE (Option):** Optional SIM can be supplied (*subject to activation order*).
- TELEPHONE TYPE:** Standard DTMF (*Dual Tone Multi Frequency*) generating telephone, cordless or mobile phone.
- PROGRAMMING:** Installer programming via SMS (*4G LTE*), telephone or mobile dial in via Electronic Voice Assist, locally via usb cable. Hy-Can Link remotely or locally.
- AUXILIARY INPUT:** x 1.
- RELAYS:** 3: 1 x 3A, 2 x 400mA.
- RELAY OUTPUTS:**
 - Dual Opto (Semiconductor Relay)**
 - Max switching current 400mA, no minimum
 - Max switching voltage 60V AC or DC
 - Single Power (Mechanical Relay)**
 - Max switching current 3A, minimum 50mA
 - Max switching voltage 60V AC or DC
- RELAY MAXIMUM PULSE TIME:** 240 seconds.
- OPERATING COMMANDS:** Default #, 2#, 3#, 4#, 5#, 6#, 7#, 8#, 9#. All relay commands are configurable.
- VOLUME:** Adjustable 1 ~ 9 levels.
- EXIT RELEASE INPUT:** Via Auxiliary input.
- CABLE DISTANCE:** Maximum 300m (*Hub and Satellite configuration*).

DOWNLOAD THE 'COMMTel COMMAND ONE' APP



- Please pay particular attention to the Safety Message Contents included on the App front page (*View Safety Message*).

OPEN | HOLD | CLOSE
at the click of a button

www.telguard.co.uk/support/downloads/apps.html

EU CE Declaration of Conformity and Radio Equipment Directive
is available at www.commtel-uk.com | GB-RH10 9XN



Raising Standards
Safety Assured



TG_HCDAB_SPEC_ISSUE 1_11.19